ELECTRICAL FRY TOP WITH CABINET BELOW MODEL NO: PP90ET8PRD

SPECIFICATIONS

- Heavy Duty Top SS 304 2mm .
- All body & Frame work SS 304.
- 20 mm Thick Heavy duty Mild Steel top for better energy containment & Hygiene.
- Double Skin Door with imported hinges & Magnet catch. Also available without door.
- Heating by means of AISI 304 stainless steel heating elements engraved in Bottom plate to give optimum & faster heat transfer.
- High accuracy Thermostat 120-310°C (EGO Germany) for precise temperature Control.
- Backup thermostat to ensure safety of heaters.
- Imported selector switch with precise temperature control.
- Inbuilt grease collection grove to reduce spillage along with large removable Grease collection tray.
- Available as Plain Top and Full Ribbed Top.



Plain Top



Plain & Ribbed Top



Full Ribbed Top

INSTALLATION PREREQUISITES

Three Phase AC Supply

Technical data

Width :	800	Gas power kW:	
Depth :	900	Electric power kW:	12 kW, 3 Phase 440V AC, 50 Hz
Height :	850		
Weight kg.:	130		

*All Dimensions are in mm.

ELECTRICAL FRY TOP WITH CABINET BELOW

MODEL NO: PP90ET8PRD

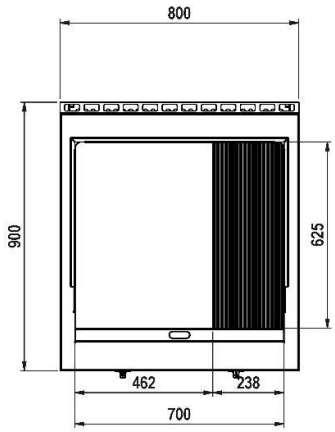

TOP VIEW

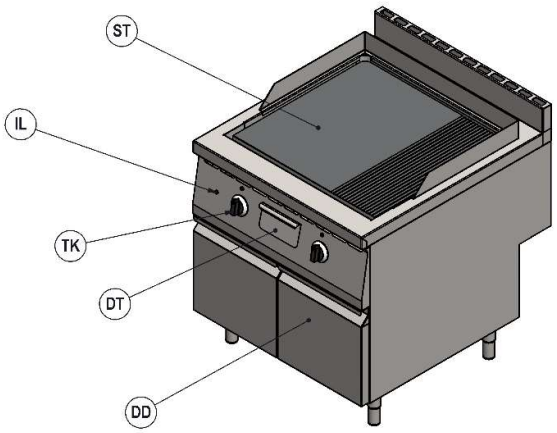

ISOMETRIC VIEW

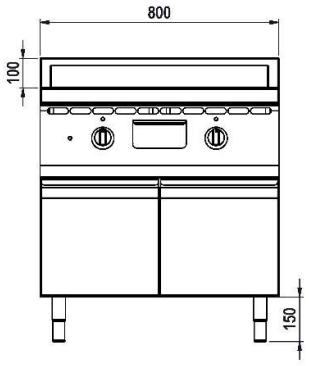

FRONT VIEW

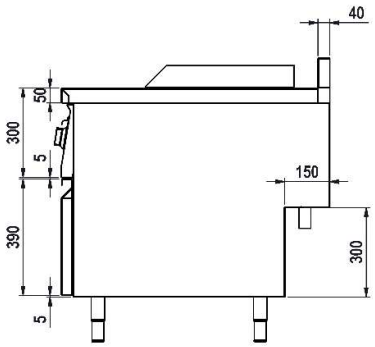

SIDE VIEW



REAR VIEW

Legend

ST:	Steel Top	DD:	Double Skin Door
IL:	Indication Light		
DT:	Drip Tray		
EP:	Electric Point		
TK:	Thermostat Knob		

*All Dimensions are in mm.